


TEMPORARY TRENCH AND ROAD SURFACE RESTORATION ASPHALT CONCRETE - OPTION 2

NO SCALE

- * ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO THE MASSAU COUNTY OR NYSDOT SPECIFICATION THAT APPLIES TO THE ITEM INDICATED
- * SUBMIT ALL PERMITS AND FEES AS PER TOWN REQUIREMENTS
- * THE PERMITEE SHALL CONTACT THE ONE CALL CENTER 811 AND HAVE A MARK-OUT PRIOR TO STARTING WORK
- * THE PERMITEE SHALL USE SAFE OPERATION SHEET PILING AS PER OSHA STANDARDS.
- * ALL SUBGRADE SHALL BE MECHANICALLY COMPACTED @ 95% STD. PROCTOR TEST.
- * UNLESS OTHERWISE SPECIFIED BY THE TOWN, BACKFILL MATERIAL SHALL CONFORM TO THIS DETAIL.
- * ALL OPENINGS IN THE PAVEMENT SHALL BE SAW CUT AND SEALED WITH AN APPROVED BITUMINOUS CRACK SEALANT.
- * THE PERMITEE RESPONSIBLE FOR OPENING MAINTENANCE & PROTECTION UNTIL FINAL APPROVAL.
- * ARRANGE FOR INSPECTION WITH THE TOWN PRIOR TO PLACEMENT OF BACKFILL AND PRIOR TO PLACEMENT OF HOT MIX ASPHALT CONCRETE.
- * THE PERMITEE SHALL MAINTAIN THE TEMPORARY RESTORATION UNTIL THE FINAL RESTORATION IS COMPLETE

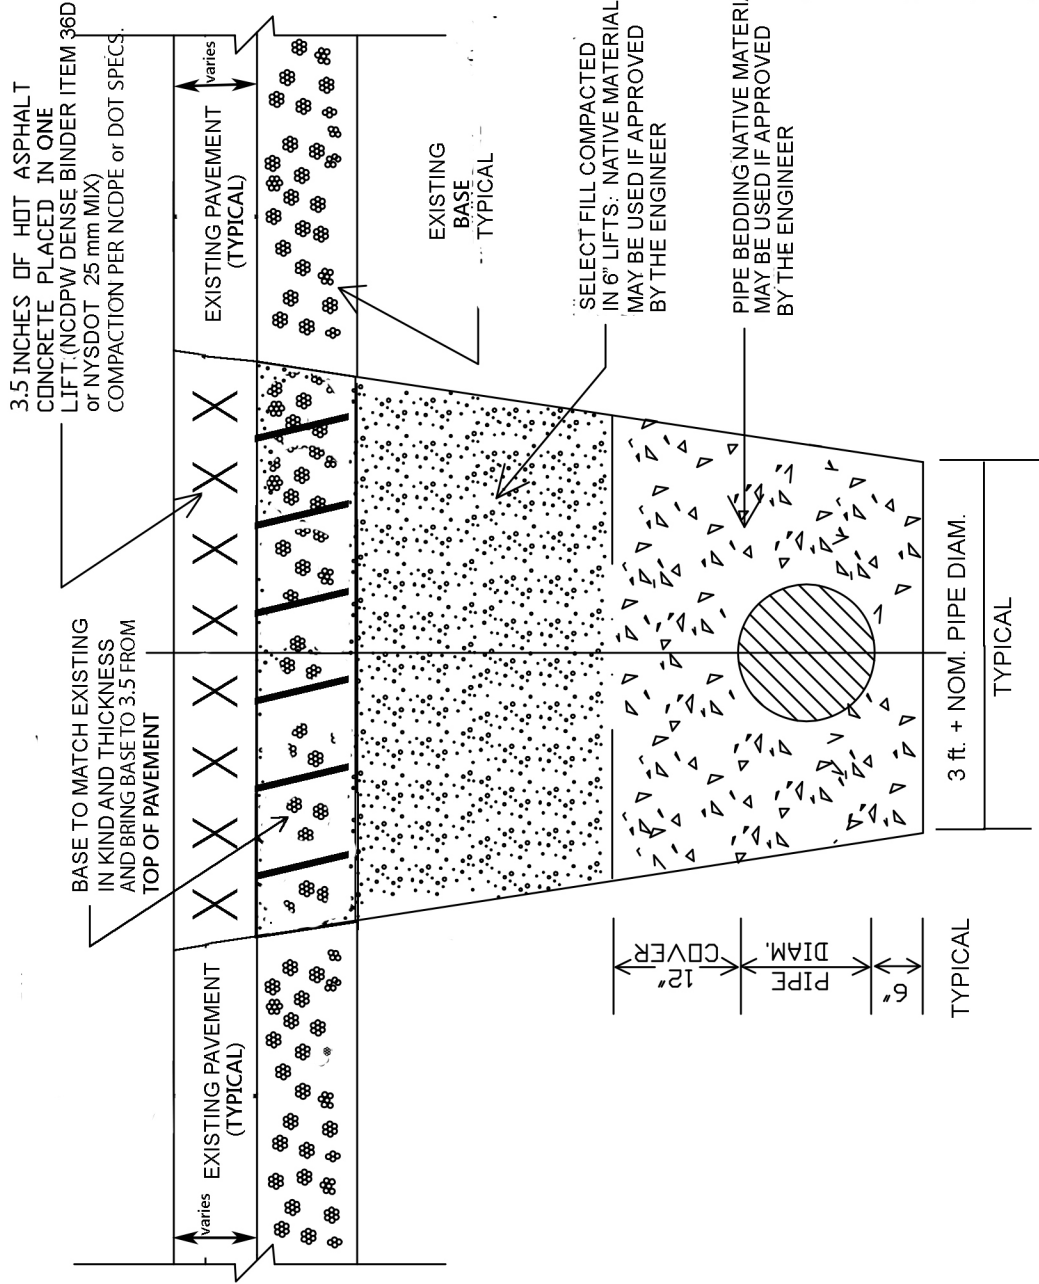

	TOWN OF OYSTER BAY
ROAD RESTORATION DETAILS AND SPECIFICATIONS	
PROPERTY ADDRESS:	
OWNER \ CONTRACTOR:	
PERMIT #:	